



TW2000-320G-30 Booster Station

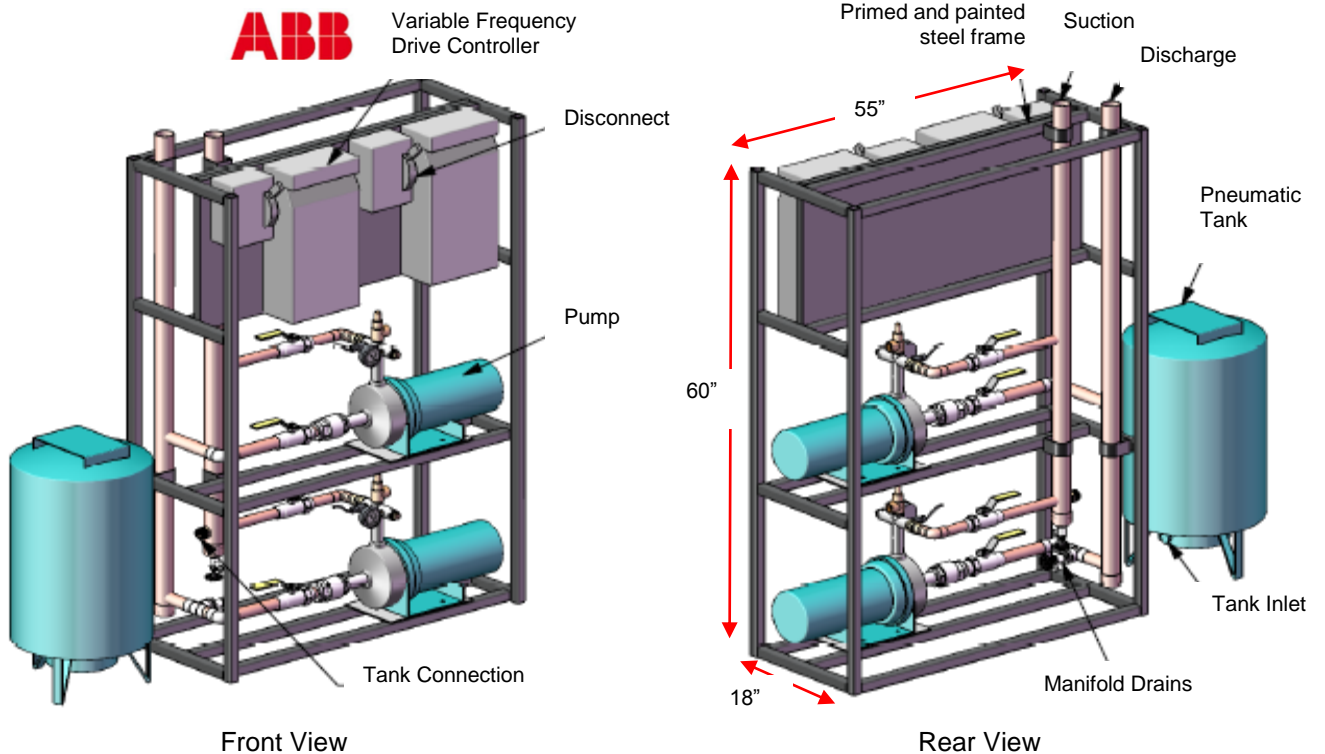

- Specifications:**
 XLG 55" W x 18" Deep x 60" High
 Pump MFG.: Gould Pump Co.
 Controller MFG.: ABB Inc. ACS310/350
 Assembler: Towle Whitney LLC
 Power: 208-220V/1PH/30Amp or
 208-220/360-480V/3PH/20Amp
 2 Independent circuits required
 Pumps: 3MC1J2G0 Cast Iron
 HP: 5 HP Per Pump
 Flow Rate: 320 GPM Total Capacity
 Boost: 30 PSI Overboost
 Suction: 2"
 Discharge: 1 1/2"
 Manifolds: 4" Type L Copper
 Roll Groove Ends
 Tank: Flotec FP7120

Some assembly required
 Picture may vary from actual system

TOWLE WHITNEY LLC
 Email: ned@towle-whitney.com
 Web: www.towle-whitney.com
 Toll Free: 800-807-9827
 Tel: 603-626-7371
 Fax: 603-626-7372

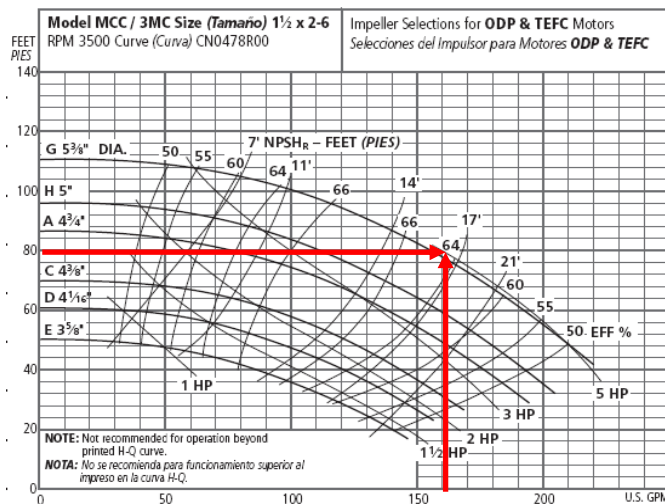

Warranties are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Water damage exclusion: It is understood that Towle Whitney LLC accepts no responsibility for water damage regardless of what or who caused water damage or any consequential personal injuries, liabilities or property damages resulting.